

V Series Standard/Low Power Solenoid Valve (3/2 way)

V

Standard/Low Power Solenoid Valve (3/2)

V321



Product Features

- * Various voltages and working styles are available.
- * Different surface treatment, thread types (G,PT,NPT) are available.
- * With manual installation, easy to debugging

How to Order?

Low Power Solenoid Valve

Series No.	Valve Body ID code	ID Code	Positions	Ways	Controls	Port Size	Voltage	Connection Mode	Cover Color	Thread Type	Valves
N	M: Standard armature +Energy saving coil Blank: Standard valve body P: Europeans valve body (Only for 3/2 way)		2: 2 positions	3:3 ways	1: Single control	M5: M5 06: 1/8"	E1: AC110V E2: AC220V E4: DC24V	Blank: DIN connector	Blank: Brown translucent J: Colorless and translucent	Blank: G P: PT T: NPT	Blank: 1Valve (No mounting accessory) 2F:2 Valves 3F:3 Valves 20F:20 Valves

Note: Only V series solenoid valve has port size M5 and only the 1 valve type (no mounting accessory)

Standard Solenoid Valve

Series No.	Ways	Positions	Controls	Port Size	ID Code	Voltage	Connection Mode	Cover Color	Thread Type	Valves
V VP	3:3 ways	2:2 positions	1: Single control	V321 M5:M5 06: 1/8" VP321 06: 1/8"	Blank: Standard type A: Amisco coil	E1: AC110V E2: AC220V E3: AC380V E4: DC24V E5: DC12V E6: AC36V E7: AC24V E8: DC110V E9: DC48V E10: DC36V	Blank: DIN connector F: Flying leads	Blank: Brown translucent J: Colorless and translucent	Blank: G P: PT T: NPT	Blank: 1Valve (No mounting accessory) 2F:2 Valves 3F:3 Valves 20F:20 Valves

Note: Only V series solenoid valve has port size M5 and only the 1 valve type (no mounting accessory)

Order Example:

N series solenoid valve, standard pilot+Energy saving coil, 3/2 way, single control, 1/8" port size, standard coil, DC24V, DIN connector, G thread, ERP code is: NM231-06E4


Specifications

Model No.	NM231-M5	NM231-06	NPM231-06	V321-M5	V321-06	VP321-06
Working medium	Clean air (After 40 μm filtration)					
Acting type	Direct acting					
Orifice (mm)	1.2					
Port size	M5	G 1/8		M5	G 1/8	
Lubrication	Not required					
Working pressure (MPa)	0-0.8					
Guaranteed pressure (MPa)	1.2					
Working temperature (°C)	-5~60(No freezing)					
Voltage range	-15% - +10%					
Power consumption	DC24V:0.7W	AC220V:0.9VA	AC110V:1.4VA	AC:4VA	DC:3W	AC:7VA DC:6.5W
Insulation class	Class F					
Protective class	IP65 (DIN40050)					
Max. acting frequency	10 cycles/s					
Seal material	NBR					
Activate time	Below 0.05 Sec.					
Weight (g)	141		138	141		138

V Series Standard/Low Power Solenoid Valve (3/2 way)



Internal Structure




No.	Designation
1	Connector
2	Connector washer
3	Nut
4	Coil
5	Pilot units
6	O-Ring
7	Spring
8	Valve body

Main Parts Material


Part name	Material
Valve body	Aluminum alloy
Connector	Engineered plastics
Connector washer	NBR
Pilot units	Pure steel+Cu+Stainless steel
Nut	POM+Carbon steel
Coil	Brass Wire covered with heat resistance colophony

Flow Chart

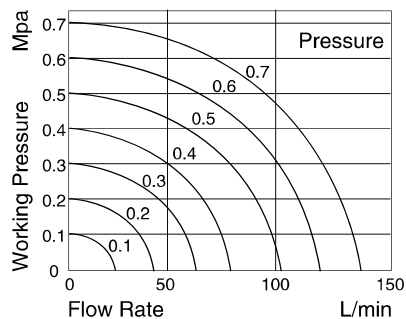



Main Dimension

V321

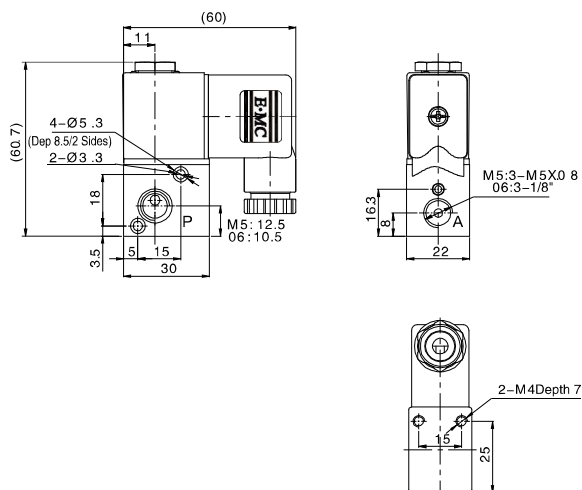

VP321

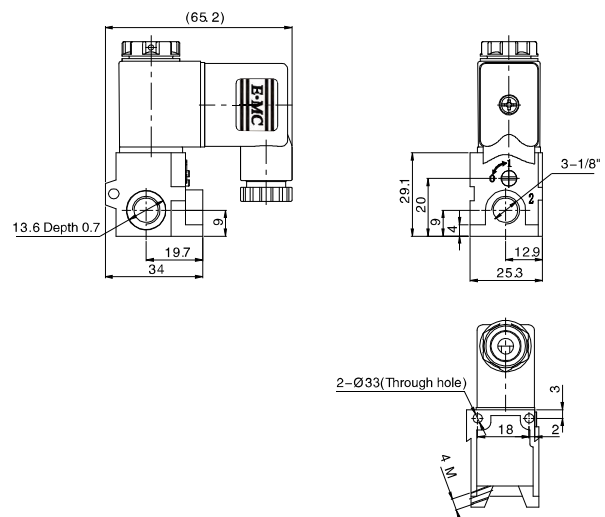

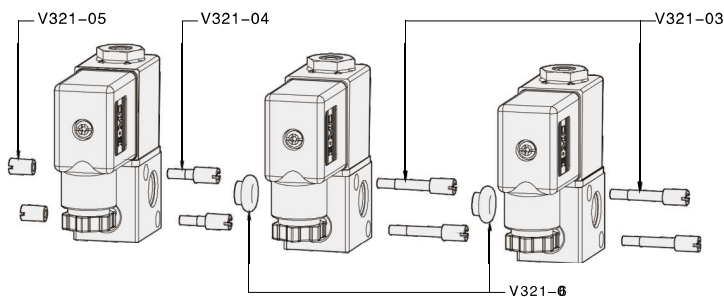

Mounting accessory order details:

Valve Quantity	V321-06□ The finished valves	V321-03	V321-04	V321-05	V321-06
V321-06□-□-2F	2	2	2	2	1
V321-06□-□-3F	3	4	2	2	2
.....					
V321-06□-□- n F	n	$2(n-1)$	2	2	$n-1$

Note : n indicates valve quantity , and $2 \leq n \leq 20$

