


Dimensional drawings

SSPC Straight

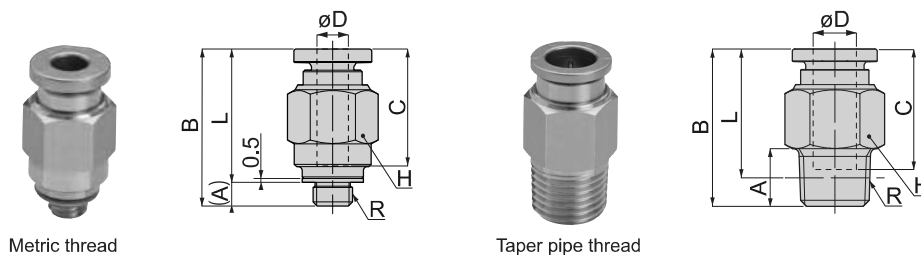


Unit : mm

Model code	Tube O.D. øD	R	A	B	L	Tube end C	Hex. H	Weight (g)	Orifice bore (ømm)
SSPC4-M5 ④⑥	4	M5×0.8	3	20	17	14.9	10	7	2.4
SSPC4-01 ④⑤⑥		R1/8	8	17.8	13.8			6.8	3
SSPC6-M5 ④⑥	6	M5×0.8	3	22.8	19.8	16.8	12	11	2.4
SSPC6-01 ④⑤⑥		R1/8	8	21.9	17.9			9.8	4.6
SSPC6-02 ④⑤⑥		R1/4	11	24.9	18.8		14	18	5
SSPC8-01 ④⑤⑥	8	R1/8	8	25.8	21.8	17.8	14	14	6
SSPC8-02 ④⑤⑥		R1/4	11	28.8	22.8			20	6
SSPC10-02 ④⑤⑥	10	R1/4	11	28.8	22.8	19.7	17	22	8.5
SSPC10-03 ④⑤⑥		R3/8	12	28.3	22			27	
SSPC12-03 ④⑤⑥	12	R3/8	12	31.2	24.9	23.3	21	36	11
SSPC12-04 ④⑤⑥		R1/2	15	33.7	25.5			50	
SSPC16-04 ④⑤⑥	16	R1/2	15	39.6	31.4	24	24	63	13

※) "L" is a reference value for height dimension after tightening a taper pipe thread.

SSPOC Inner Hex. Straight

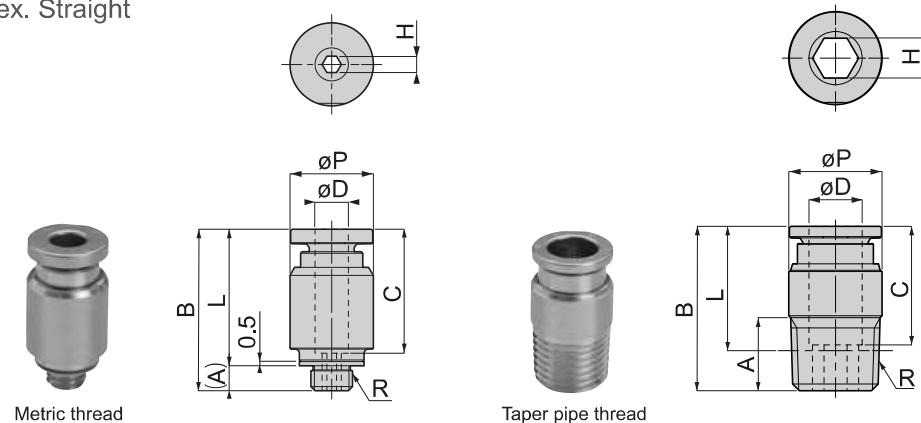

Unit : mm

Model code	Tube O.D. øD	R	A	B	L	øP	Tube end C	Hex. H	Weight (g)	Orifice bore (ømm)
SSPOC4-M5 ④⑥	4	M5×0.8	3	19.4	16.4	10	14.9	2	7	2.1
SSPOC4-01 ④⑤⑥		R1/8	8	20	16			2.5	7.8	2.6
SSPOC6-M5 ④⑥	6	M5×0.8	3	22.3	19.3	12	16.8	2	9.4	2.1
SSPOC6-01 ④⑤⑥		R1/8	8	21.9	17.9			4	9.1	4.2
SSPOC6-02 ④⑤⑥		R1/4	11	22.1	16	14		4	15	
SSPOC8-01 ④⑤⑥	8	R1/8	8	25.8	21.8	14	17.8	5	13	5.3
SSPOC8-02 ④⑤⑥		R1/4	11	24.7	18.7			6	14	6.3
SSPOC10-02 ④⑤⑥	10	R1/4	11	28.8	22.8	17	19.7	6	21	6.3
SSPOC10-03 ④⑤⑥		R3/8	12	26.7	20.4				25	
SSPOC12-03 ④⑤⑥	12	R3/8	12	31.2	24.9	20	23.3	8	33	8.4
SSPOC12-04 ④⑤⑥		R1/2	15	31.1	22.9	22			47	
SSPOC16-04 ④⑤⑥	16	R1/2	15	37	28.8	24	24	12	49	12.6

※) "L" is a reference value for height dimension after tightening a taper pipe thread.