



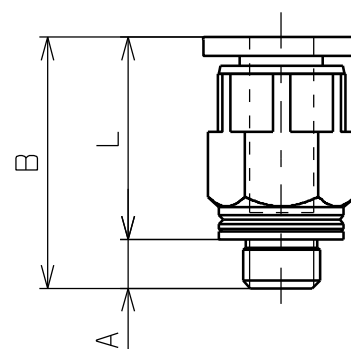

Straight

RoHS compliant

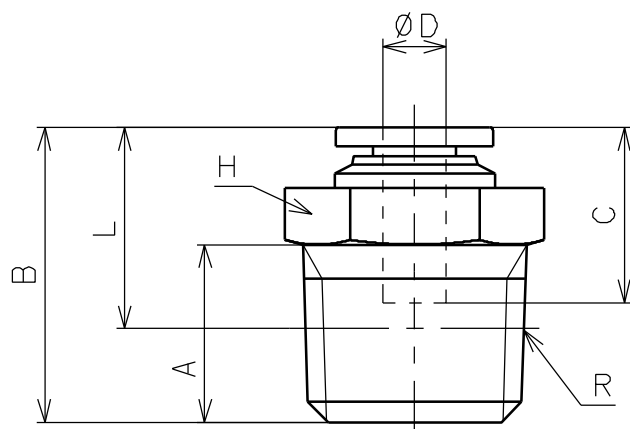

↑ unified thread

❖ NPT and UNF

unit: inch

Model	Tube O.D. φ D	R	A	B	L	C	Hex.	Orifice φ (mm)	Wt. (g)	CAD file name
PC3-U10MU	3	10-32UNF	0.12	0.61	0.50	0.43	5/16	2.0	3.2	PC3-U10MU
PC3-N1MU	3	1/8-27NPT	0.31	0.61	0.45	0.43	7/16	2.0	7.6	PC3-N1MU
PC4-U10MU	4	10-32UNF	0.12	0.61	0.50	0.43	5/16	2.4	3.1	PC4-U10MU
PC4-N1MU	4	1/8-27NPT	0.31	0.61	0.45	0.43	7/16	2.5	7.4	PC4-N1MU
PC6-U10MU	6	10-32UNF	0.12	0.64	0.52	0.46	7/16	2.4	7.5	PC6-U10MU
PC6-N1MU	6	1/8-27NPT	0.31	0.69	0.53	0.46	7/16	4.6	7.5	PC6-N1MU
PC1/8-U10MU	1/8	10-32UNF	0.12	0.61	0.50	0.43	5/16	2.0	3.2	PC1_8-U10MU
PC1/8-N0MU	1/8	1/16-27NPT	0.31	0.70	0.54	0.43	7/16	2.0	7.3	PC1_8-N0MU
PC1/8-N1MU	1/8	1/8-27NPT	0.31	0.61	0.45	0.43	7/16	2.0	7.6	PC1_8-N1MU
PC1/8-N2MU	1/8	1/4-18NPT	0.43	0.72	0.49	0.43	9/16	2.0	16	PC1_8-N2MU
PC5/32-U10MU	5/32	10-32UNF	0.12	0.61	0.50	0.43	5/16	2.4	3.1	PC5_32-U10MU
PC5/32-N0MU	5/32	1/16-27NPT	0.31	0.70	0.54	0.43	7/16	2.5	7.3	PC5_32-N0MU
PC5/32-N1MU	5/32	1/8-27NPT	0.31	0.61	0.45	0.43	7/16	2.5	7.4	PC5_32-N1MU
PC5/32-N2MU	5/32	1/4-18NPT	0.43	0.72	0.49	0.43	9/16	2.5	16	PC5_32-N2MU
PC1/4-U10MU	1/4	10-32UNF	0.12	0.63	0.52	0.45	7/16	2.4	5.2	PC1_4-U10MU
PC1/4-N0MU	1/4	1/16-27NPT	0.31	0.78	0.62	0.45	7/16	3.5	7.1	PC1_4-N0MU
PC1/4-N1MU	1/4	1/8-27NPT	0.31	0.74	0.58	0.45	7/16	4.6	7.7	PC1_4-N1MU
PC1/4-N2MU	1/4	1/4-18NPT	0.43	0.74	0.51	0.45	9/16	4.6	14	PC1_4-N2MU
PC1/4-N3MU	1/4	3/8-18NPT	0.47	0.78	0.54	0.45	11/16	4.6	27	PC1_4-N3MU