


Metric thread type



PC4-M50

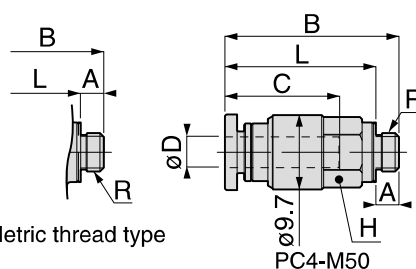

Unit : mm

Model code	Tube O.D. øD	R	A	B	L	Tube end C	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PC4-M5④	4	M5 × 0.8	2.8 [3]	19.8	17 [16.8]	14.9	10	2.4	5.6	PC4-M5_[C]
PC4-M50④				22.7	19.9 [19.7]		8		6.1	PC4-M50_[C]
PC4-M6④		M6 × 1	3.8	20.8	17		10	3	6	PC4-M6_[C]
PC4-01④		R1/8	8	21	17		10		7.4	PC4-01_
PC4-02④		R1/4	11	22.5	16.5		14		16	PC4-02_
PC6-M5④	6	M5 × 0.8	2.8 [3]	21.9	19.1 [18.9]	17	12	2.4	8.1	PC6-M5_[C]
PC6-M6④		M6 × 1	3.8	22.9	19.1			3	8.5	PC6-M6_[C]
PC6-01④		R1/8	8	22.3	18.3		14	5	8.2	PC6-01_
PC6-02④		R1/4	11	23.7	17.6				15	PC6-02_
PC6-03④		R3/8	12	24.5	18.1				17	28
PC8-01④	8	R1/8	8	27.9	23.9	18.2	14	6	14	PC8-01_
PC8-02④		R1/4	11	26.6	20.6		17	7	25	PC8-02_
PC8-03④		R3/8	12	25.5	19.2			17	25	PC8-03_
PC10-01④	10	R1/8	8	30.3	26.3	20.7	17	6	21	PC10-01_
PC10-02④		R1/4	11	29.8	23.8			8.5	19	PC10-02_
PC10-03④		R3/8	12	29.3	23		21	9	24	PC10-03_
PC10-04④		R1/2	15	30.4	22.2			9	46	PC10-04_
PC12-02④	12	R1/4	11	35.9	29.9	23.3	21	8.5	37	PC12-02_
PC12-03④		R3/8	12	31.9	25.6			11	30	PC12-03_
PC12-04④		R1/2	15	33.9	25.7				44	PC12-04_
PC16-03④	16	R3/8	12	39.3	33	24.8	24	11	54	PC16-03_
PC16-04④		R1/2	15	41.3	33.1			13	63	PC16-04_
PC5/32-M5④	5/32	M5 × 0.8	2.8 [3]	19.8	17 [16.8]	14.9	10	2.4	5.6	PC5_32-M5_[C]
PC5/32-01④		R1/8	8	21	17			3	7.4	PC5_32-01_
PC5/32-02④		R1/4	11	22.5	16.5		14	16	PC5_32-02_	
PC3/16-M5④	3/16	M5 × 0.8	2.8 [3]	22.3	19.5 [19.3]	17.4	12	2.4	8.6	PC3_16-M5_[C]
PC3/16-01④		R1/8	8	22.7	18.7			4	9	PC3_16-01_
PC3/16-02④		R1/4	11	24.1	18		14		16	PC3_16-02_
PC1/4-M5④	1/4	M5 × 0.8	2.8 [3]	21.9	19.1 [18.9]	17	12	2.4	8	PC1_4-M5_[C]
PC1/4-01④		R1/8	8	22.3	18.3		14	5.3	15	PC1_4-01_
PC1/4-02④		R1/4	11	23.7	17.6				28	PC1_4-02_
PC1/4-03④		R3/8	12	24.5	18.1		17		47	PC1_4-03_
PC5/16-01④	5/16	R1/8	8	27.9	23.9	18.2	14	6	14	PC5_16-01_
PC5/16-02④		R1/4	11	26.6	20.6			7	25	PC5_16-02_
PC5/16-03④		R3/8	12	25.5	19.2		17		25	PC5_16-03_
PC3/8-01④	3/8	R1/8	8	30.3	26.3	20.7	17	6	22	PC3_8-01_
PC3/8-02④		R1/4	11	29.8	23.8			8.5	19	PC3_8-02_
PC3/8-03④		R3/8	12	29.3	23				25	PC3_8-03_
PC3/8-04④		R1/2	15	30.4	22.2		21	47	PC3_8-04_	
PC1/2-02④	1/2	R1/4	11	35.7	29.7	23.1	21	8.5	36	PC1_2-02_
PC1/2-03④		R3/8	12	31.7	25.4			11	29	PC1_2-03_
PC1/2-04④		R1/2	15	33.7	25.5				43	PC1_2-04_
PC5/8-03④	5/8	R3/8	12	39.3	33	24.8	24	11	54	PC5_8-03_
PC5/8-04④		R1/2	15	41.3	33.1			13	63	PC5_8-04_

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L" is a reference value for height dimension after tightening taper thread.

※ 3. Dimensions in [] are for clean-room and clean-wash package products.

※ 4. Orifice bore is the smallest passage converted in terms of the diameter.