




Run Tee

RoHS compliant

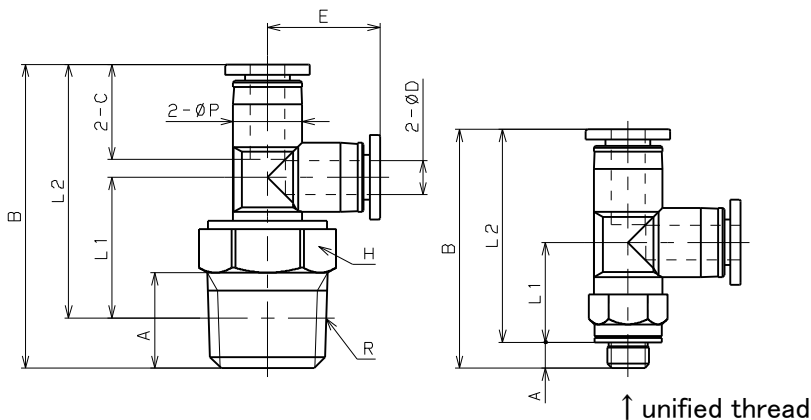

❖ NPT and UNF

unit: inch

Model	O.D. ø D	R	A	B	L1	L2	ø P	C	E	Hex.	Orifice ø (mm)	Wt (g)	CAD file name
PD1/8-U10MU	1/8	10-32UNF	0.12	1.09	0.45	0.97	0.31	0.43	0.52	5/16	2.4	4.4	PD1_8-U10MU
PD1/8-N0MU	1/8	1/16-27NPT	0.31	1.28	0.61	1.12	0.31	0.43	0.52	7/16	2.5	8.6	PD1_8-N0MU
PD1/8-N1MU	1/8	1/8-27NPT	0.31	1.19	0.51	1.02	0.31	0.43	0.52	7/16	2.5	8.1	PD1_8-N1MU
PD1/8-N2MU	1/8	1/4-18NPT	0.43	1.38	0.64	1.15	0.31	0.43	0.52	9/16	2.5	19	PD1_8-N1MU
PD5/32-U10MU	5/32	10-32UNF	0.12	1.09	0.45	0.97	0.31	0.43	0.52	5/16	2.4	4.3	PD5_32-U10MU
PD5/32-N0MU	5/32	1/16-27NPT	0.31	1.28	0.61	1.12	0.31	0.43	0.52	7/16	2.5	8.5	PD5_32-N0MU
PD5/32-N1MU	5/32	1/8-27NPT	0.31	1.19	0.51	1.02	0.31	0.43	0.52	7/16	2.5	8	PD5_32-N1MU
PD5/32-N2MU	5/32	1/4-18NPT	0.43	1.38	0.64	1.15	0.31	0.43	0.52	9/16	2.5	14	PD5_32-N2MU
PD1/4-U10MU	1/4	10-32UNF	0.12	1.21	0.49	1.09	0.41	0.45	0.60	5/16	2.4	5.4	PD1_4-U10MU
PD1/4-N0MU	1/4	1/16-27NPT	0.31	1.41	0.65	1.24	0.41	0.45	0.60	7/16	3.5	9.5	PD1_4-N0MU
PD1/4-N1MU	1/4	1/8-27NPT	0.31	1.31	0.55	1.14	0.41	0.45	0.60	7/16	4.0	9	PD1_4-N1MU
PD1/4-N2MU	1/4	1/4-18NPT	0.43	1.50	0.68	1.28	0.41	0.45	0.60	9/16	4.0	15	PD1_4-N2MU
PD1/4-N3MU	1/4	3/8-18NPT	0.47	1.54	0.70	1.30	0.41	0.45	0.60	11/16	4.0	24	PD1_4-N3MU