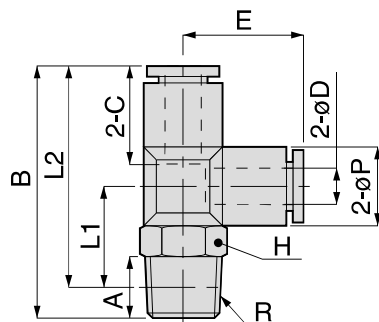


Unit : mm

Model code	Tube O.D. øD	R	A	B	L1	L2	øP	Tube end C	E	Hex. H	X (øX)	Y	Effective area (mm ²)	Weight (g)	CAD file name
PD180-M3M ⁽⁴⁾⁽⁵⁾	1.8	M3×0.5	2.5 [2.2]	22.3	9.5 [9.8]	19.8 [20.1]	6	8.4	10.3	5.5	4.8	—	0.6	1.9	PD180-M3M(※5)
PD180-M5M ⁽⁴⁾⁽⁵⁾		M5×0.8	3 [3.2]	23.8	10.5 [10.3]	20.8 [20.6]				8			0.8	3.2	PD180-M5M(※5)
PD3-M3M ⁽⁴⁾⁽⁵⁾	3	M3×0.5	2.5 [2.2]	22.8	9.5 [9.8]	20.3 [20.6]	6	9.3	10.8	5.5	7	6	0.7	1.9	PD3-M3M(※5)
PD3-M5M ⁽⁴⁾⁽⁵⁾		M5×0.8	3 [3.2]	24.3	10.5 [10.3]	21.3 [21.1]				8			2.2	3.2	PD3-M5M(※5)
PD3-M6M ⁽⁴⁾⁽⁵⁾		M6×1	3.9	25.3	10.6	21.4				8			2	3.6	PD3-M6M
PD3-01M ^{(4)(5)*}		R1/8	8	30.1	13	26.1				10			2.2	7.3	PD3-01M
PD4-M3M ⁽⁴⁾⁽⁵⁾	4	M3×0.5	2.5 [2.2]	28.1	12.5 [12.8]	25.6 [25.9]	8	11	13.1	8	9.8	7.8	0.9	4	PD4-M3M(※5)
PD4-M5M ⁽⁴⁾⁽⁵⁾		M5×0.8	3 [3.2]	27.6	11.5 [11.3]	24.6 [24.4]				8			2.1	4.4	PD4-M5M(※5)
PD4-M6M ⁽⁴⁾⁽⁵⁾		M6×1	3.9	28.6	11.6	24.7				10			2.2	4.7	PD4-M6M
PD4-01M ⁽⁴⁾⁽⁵⁾		R1/8	8	30.1	13	26.1				10			4.6	7.3	PD4-01M
PD4-02M ⁽⁴⁾⁽⁵⁾		R1/4	11	35.1	16	29				14			3.3	14	PD4-02M
PD6-M5M ⁽⁴⁾⁽⁵⁾	6	M5×0.8	3 [3.2]	30.5	12.5 [12.3]	27.5 [27.3]	10.5	11.6	15	8	11.8	9.8	2.2	5.6	PD6-M5M(※5)
PD6-M6M ⁽⁴⁾⁽⁵⁾		M6×1	3.9	31.5	12.6	27.6				8			3.3	5.9	PD6-M6M
PD6-01M ⁽⁴⁾⁽⁵⁾		R1/8	8	33	14	29				10			8.5	8.4	PD6-01M
PD6-02M ⁽⁴⁾⁽⁵⁾		R1/4	11	38	17	31.9				14			6.6	15	PD6-02M
PD6-03M ⁽⁴⁾⁽⁵⁾		R3/8	12	39	17.7	32.6				17			8.9	23	PD6-03M
PD1'8-M3M ⁽⁴⁾⁽⁵⁾	1/8	M3×0.5	2.5 [2.2]	28.1	12.5 [12.8]	25.6 [25.9]	8	11	13.1	8	9.8	7.8	0.9	4.1	PD1'8-M3M(※5)
PD1'8-M5M ⁽⁴⁾⁽⁵⁾		M5×0.8	3 [3.2]	27.6	11.5 [11.3]	24.6 [24.4]				8			2.4	4.5	PD1'8-M5M(※5)
PD1'8-M6M ⁽⁴⁾⁽⁵⁾		M6×1	3.9	28.6	11.6	24.7				10			2	4.8	PD1'8-M6M
PD1'8-01M ⁽⁴⁾⁽⁵⁾		R1/8	8	30.1	13	26.1				10			2.5	7.4	PD1'8-01M
PD5'32-M3M ⁽⁴⁾⁽⁵⁾	5/32	M3×0.5	2.5 [2.2]	28.1	12.5 [12.8]	25.6 [25.9]	8	11	13.1	8	9.8	7.8	0.9	4	PD5'32-M3M(※5)
PD5'32-M5M ⁽⁴⁾⁽⁵⁾		M5×0.8	3 [3.2]	27.6	11.5 [11.3]	24.6 [24.4]				8			4.4	4.4	PD5'32-M5M(※5)
PD5'32-M6M ⁽⁴⁾⁽⁵⁾		M6×1	3.9	28.6	11.6	24.7				10			3.1	4.7	PD5'32-M6M
PD5'32-01M ⁽⁴⁾⁽⁵⁾		R1/8	8	30.1	13	26.1				10			7.3	7.3	PD5'32-01M
PD5'32-02M ⁽⁴⁾⁽⁵⁾		R1/4	11	35.1	16	29				14			3.3	14	PD5'32-02M
PD1'4-M5M ⁽⁴⁾⁽⁵⁾	1/4	M5×0.8	3 [3.2]	30.7	12.5 [12.3]	27.7 [27.5]	10.5	11.4	15.2	8	11.8	9.8	3.6	5.4	PD1'4-M5M(※5)
PD1'4-M6M ⁽⁴⁾⁽⁵⁾		M6×1	3.9	31.7	12.6	27.8				10			3.7	5.6	PD1'4-M6M
PD1'4-01M ⁽⁴⁾⁽⁵⁾		R1/8	8	33.2	14	29.2				10			8.5	8.2	PD1'4-01M

- ※ 1. ④ in Model code / Replaced with "W" for Light-gray color
 ※ 2. ⑤ in Model code / Replaced with "C" for Clean-room package
 ※ 3. "L1" and "L2" are reference values for height dimensions after tightening taper thread.
 ※ 4. Dimensions in [] are for clean-room package products
 ※ 5. Visit PISCO website for CAD data of clean-room package products.