




PD Run Tee

RoHS compliant

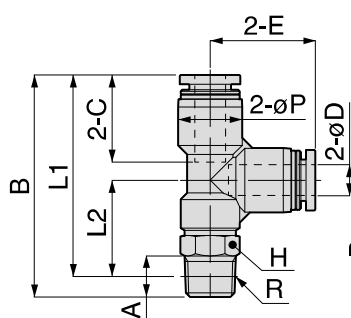

Metric thread type

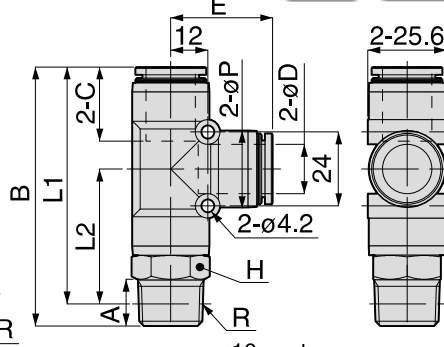

ø16mm type

Unit : mm

Model code	Tube O.D. øD	R	A	B	L1	L2	øP	Tube end C	E	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PD4-M5④	4	M5 × 0.8	2.8 [3]	33.7	30.9 [30.7]	13.7 [13.5]	10	14.9	17.2	8	2.4	7.8	PD4-M5_[C]
PD4-M6④		M6 × 1	3.8	38.2	34.4	17.2				10	2.8	11	PD4-M6_[C]
PD4-01④		R1/8	8	40.2	36.2	19				14	2.8	13	PD4-01_
PD4-02④		R1/4	11	46.2	40.2	23					2.8	20	PD4-02_
PD6-M5④	6	M5 × 0.8	2.8 [3]	40.3	37.5 [37.3]	17 [16.8]	12.5	17	20.5	10	2.4	12	PD6-M5_[C]
PD6-M6④		M6 × 1	3.8	41.3	37.5	17				10	3	12	PD6-M6_[C]
PD6-01④		R1/8	8	43.3	39.3	18.8				14	4.3	14	PD6-01_
PD6-02④		R1/4	11	48.8	42.7	22.2					4.3	22	PD6-02_
PD6-03④	8	R3/8	12	52	45.7	25.2	14.5	18.1	21.5	17	6	32	PD6-03_
PD8-01④*		R1/8	8	46.9	42.9	20				12	6	19	PD8-01_
PD8-02④*		R1/4	11	51.7	45.7	22.8				14	6.7	25	PD8-02_
PD8-03④*		R3/8	12	55.4	49.1	26.2				17	6.7	35	PD8-03_
PD10-01④	10	R1/8	8	51.2	47.2	21	17.5	20.2	25.5	12	6	25	PD10-01_
PD10-02④*		R1/4	11	54.7	48.7	22.5				14	8	31	PD10-02_
PD10-03④*		R3/8	12	58.2	51.9	25.7				17	8.3	42	PD10-03_
PD10-04④		R1/2	15	62.2	54	27.8				21	8.3	65	PD10-04_
PD12-02④	12	R1/4	11	60.3	54.2	23.7	21	23.4	30	14	8	38	PD12-02_
PD12-03④		R3/8	12	63.5	57.2	26.7				17	10	48	PD12-03_
PD12-04④		R1/2	15	67.5	59.3	28.8				21	10.3	72	PD12-04_
PD16-03④	16	R3/8	11	80.1	73.8	40.7	25	24.1	33.1	22	11	89	PD16-03_
PD16-04④		R1/2	15	84.1	75.9	42.8					13	93	PD16-04_

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L1" and "L2" are reference values for height dimensions after tightening taper thread.

※ 3. Space saving types are available for model codes with * mark. See page 762.

※ 4. Dimensions in [] are for clean-room and clean-wash package products

※ 5. Orifice bore is the smallest passage converted in terms of the diameter.

FITTING
CONTROLLER
VALVE
TUBE

MAKE-TO-ORDER
PRODUCTS

64

Standard
Series

Mini
Series

Stainless
Series

Chemical
Series

PP
Series

EG
Series

Antiseptic
& Brass Series

Die Temperature
Control

Minimal
Series

Stoo Fitting
Series

Rotary
Series

Twist-Proof
Fitting


Block and
Connector

Coupling

Color
Cap



Run Tee (Inch size)



Unit : mm

Model code	Tube O.D. øD	R	A	B	L1	L2	øP	Tube end C	E	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PD5/32-01 ④	5/32	R1/8	8	40.2	36.2	19	10	14.9	17.2	10	2.8	13	PD5_32-01_
PD5/32-02 ④		R1/4	11	46.2	40.2	23			19.2	14		20	PD5_32-02_
PD3/16-01 ④	3/16	R1/8	8	43.7	39.7	18.8	12.5	17.4	20.9	10	3.3	15	PD3_16-01_
PD3/16-02 ④		R1/4	11	49.2	43.1	22.2			20.9	14		22	PD3_16-02_
PD1/4-01 ④	1/4	R1/8	8	43.3	39.3	18.8	12.5	17	20.5	10	5.3	14	PD1_4-01_
PD1/4-02 ④		R1/4	11	48.8	42.7	22.2			20.5	14		22	PD1_4-02_
PD1/4-03 ④		R3/8	12	52	45.7	25.2			21.5	17		32	PD1_4-03_
PD5/16-01 ④	5/16	R1/8	8	46.9	42.9	20	14.5	18.1	22.9	12	6.7	19	PD5_16-01_
PD5/16-02 ④		R1/4	11	51.7	45.7	22.8			22.9	14		25	PD5_16-02_
PD5/16-03 ④		R3/8	12	55.4	49.1	26.2			22.9	17		35	PD5_16-03_
PD3/8-01 ④	3/8	R1/8	8	51.2	47.2	21	17.5	20.2	25.5	12	8.2	25	PD3_8-01_
PD3/8-02 ④		R1/4	11	54.7	48.7	22.5			26.2	14		31	PD3_8-02_
PD3/8-03 ④		R3/8	12	58.2	51.9	25.7			26.2	17		42	PD3_8-03_
PD3/8-04 ④		R1/2	15	62.2	54	27.8			27.3	21		65	PD3_8-04_
PD1/2-02 ④	1/2	R1/4	11	60.6	54.5	23.7	21	23.7	30.3	14	8	37	PD1_2-02_
PD1/2-03 ④		R3/8	12	63.8	57.5	26.7			30.8	17		47	PD1_2-03_
PD1/2-04 ④		R1/2	15	67.8	59.6	28.8			31	21		71	PD1_2-04_

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L1" and "L2" are reference values for height dimensions after tightening taper thread.

※ 3. Orifice bore is the smallest passage converted in terms of the diameter.