




PE Union Tee

RoHS compliant

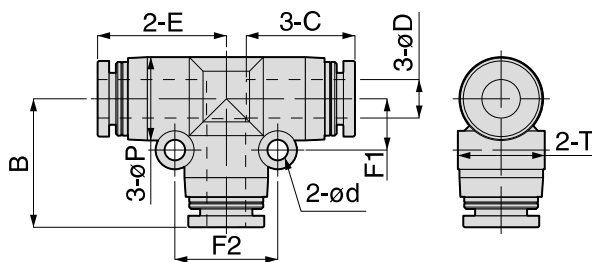

OP.
P.754

3D
CAD

CAD

Unit : mm

Model code	Tube O.D. øD	øP	Tube end C	E	ød	T	F1	F2	B	Orifice bore (ømm)	Weight (g)	CAD file name
PE4④	4	10	14.9	17.2	3.2	10.4	6.5	13	17.2	2.8	7.5	PE4
PE6④	6	13	17	20.05	3.2	13.5	8	16	20.1	4.8	11	PE6
PE8④	8	15	18.1	22.2	3.2	15.6	9	18	22.2	6.2	16	PE8
PE10④	10	17.5	20.2	25.2	4.2	18.2	12	24	25.2	8.1	25	PE10
PE12④	12	21	22.9	28.4	4.2	21.7	14	28	28.2	10	36	PE12
PE16④	16	25	24.1	33.1	4.2	25.6	12	24	33.1	13	44	PE16
PE5/32④	5/32	10	14.9	17.2	3.2	10.4	6.5	13	17.2	2.8	7.5	PE5_32
PE3/16④	3/16	13	17.4	20.45	3.2	13.5	8	16	20.5	3.8	12	PE3_16
PE1/4④	1/4	13	17	20.05	3.2	13.5	8	16	20.1	4.8	11	PE1_4
PE5/16④	5/16	15	18.1	22.2	3.2	15.6	9	18	22.2	6.2	16	PE5_16
PE3/8④	3/8	17.5	20.2	25.2	4.2	18.2	12	24	25.2	8.1	25	PE3_8
PE1/2④	1/2	21	23.2	28.7	4.2	21.7	14	28	28.5	10.7	34	PE1_2

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. Orifice bore is the smallest passage converted in terms of the diameter.