


PKVD Twin Triple Run Tee

RoHS compliant

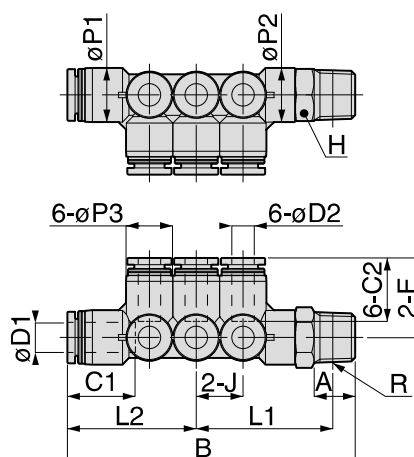

Unit : mm

Model code	Tube O.D. øD1	Tube O.D. øD2	R	A	B	E	L1	L2	J	øP1	øP2	øP3	Tube end C1	Tube end C2	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PKVD8-4-02 ④	8	4	R1/4	11	69.2	19.2	32	31.2	10	14.5	14.5	10	18.1	14.9	14	3	32	PKVD8-4-02_
PKVD8-4-03 ④			R3/8	12	72.2		34.7				18				17		46	PKVD8-4-03_
PKVD8-6-02 ④		6	R1/4	11	76.9	21.3	36.5	34.4	12.5		14.5	12.5		17	14	4.6	41	PKVD8-6-02_
PKVD8-6-03 ④			R3/8	12	80.7		39.9				18				17		52	PKVD8-6-03_
PKVD10-6-03 ④	10	6	R3/8	12	81.5	22.3	38.2	37	12.5	17.5	18	12.5	20.2	17	17	4.6	56	PKVD10-6-03_
PKVD10-6-04 ④			R1/2	15	85.5		40.3				20				21		78	PKVD10-6-04_
PKVD10-8-03 ④		8	R3/8	12	87.8	23.7	41.5	40	14.5		18	14.5		18.1	17	6.7	65	PKVD10-8-03_
PKVD10-8-04 ④			R1/2	15	91.8		43.6				20				21		87	PKVD10-8-04_

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L1" is a reference value for height dimension after tightening thread.

※ 3. Orifice bore is the smallest passage converted in terms of the diameter.

68

Standard Series

Mini Series

Stainless Series

Chemical Series

PP Series

EG Series

Antiseptics & Brass Series

Die Temperature Control

Minimal Series

Stoo Fitting Series

Rotary Series

Twist-Proof Fitting

Block and Connector

Coupling

Color Cap