


PL Elbow

RoHS compliant

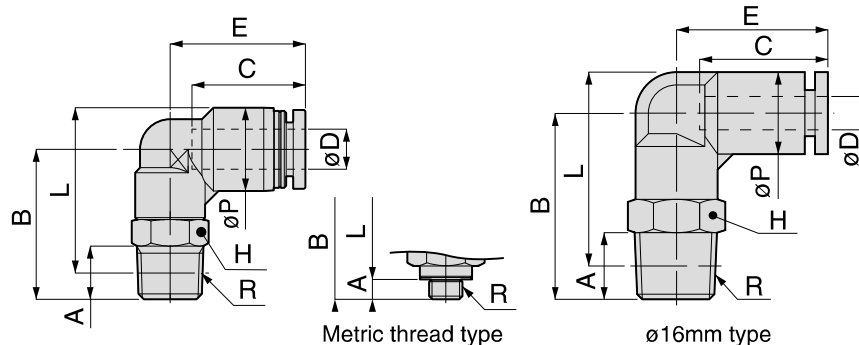

Unit : mm

Model code	Model code	R	A	B	L	øP	Tube end C	E	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PL4-M5 ④	4	M5 × 0.8	2.8 [3]	16	18.2 [18]	10	14.9	17.7	8	2.4	5.7	PL4-M5_[C]
PL4-M6 ④		M6 × 1	3.8	20	21.2			18.7	10	2.8	8	PL4-M6_[C]
PL4-01 ④		R1/8	8	22	23			20.7	14	2.8	10	PL4-01_
PL4-02 ④		R1/4	11	29	28						18	PL4-02_
PL6-M5 ④	6	M5 × 0.8	2.8 [3]	19.5	23 [22.8]	12.5	17	20.3	10	2.4	8.9	PL6-M5_[C]
PL6-M6 ④		M6 × 1	3.8	20.5	23					3	8	PL6-M6_[C]
PL6-01 ④		R1/8	8	22.5	24.8					4.2	11	PL6-01_
PL6-02 ④		R1/4	11	28	28.2			21.8	14	4.3	19	PL6-02_
PL6-03 ④		R3/8	12	31.5	31.4			23.8	17		30	PL6-03_
PL8-01 ④ *	8	R1/8	8	24	27.3	14.5	18.1	22.7	12	6.7	14	PL8-01_
PL8-02 ④ *		R1/4	11	28	29.2			23.7	14		20	PL8-02_
PL8-03 ④ *		R3/8	12	31	31.9			24.7	17		31	PL8-03_
PL10-01 ④	10	R1/8	8	25	29.8	17.5	20.2	25.5	12	8.3	18	PL10-01_
PL10-02 ④ *		R1/4	11	28.5	31.2			26	14		23	PL10-02_
PL10-03 ④ *		R3/8	12	32	34.4			27	17		34	PL10-03_
PL10-04 ④		R1/2	15	36	36.6			27.5	21		57	PL10-04_
PL12-02 ④	12	R1/4	11	29.8	34.2	21	23.4	29	14	8	27	PL12-02_
PL12-03 ④		R3/8	12	32.5	36.7			29.7	17	10	38	PL12-03_
PL12-04 ④		R1/2	15	36.5	38.8			30.7	21	10.3	61	PL12-04_
PL16-03 ④	16	R3/8	11	47	53.2	25	24.1	33.1	22	11	74	PL16-03_
PL16-04 ④		R1/2	15	51	55.3					13	79	PL16-04_

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L" is a reference value for height dimension after tightening taper thread.

※ 3. Space saving types are available for model codes with * mark. See page 762.

※ 4. Dimensions in [] are for clean-room and clean-wash package products


※ 5. Orifice bore is the smallest passage converted in terms of the diameter.



Elbow (Inch size)

OP.
P.7543D
CAD

CAD

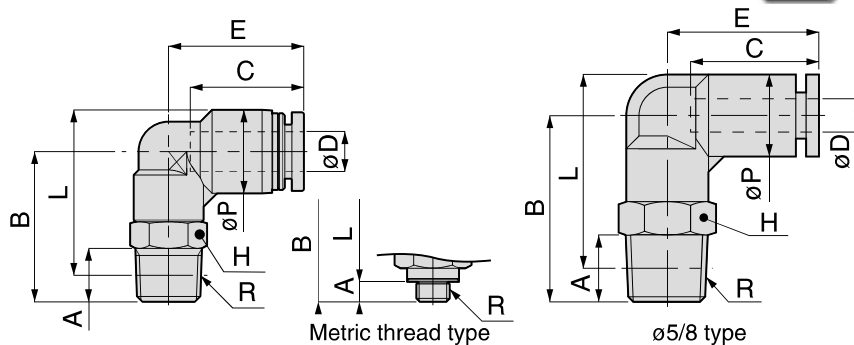

Unit : mm

Model code	Tube O.D. øD	R	A	B	L	øP	Tube end C	E	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name	
PL5/32-M5④	5/32	M5×0.8	2.8 [3]	16	18.2 [18]	10	14.9	17.7	8	2.4	5.7	PL5_32-M5_[C]	
PL5/32-01 ④		R1/8	8	22	23			18.7	10	2.8	10	PL5_32-01_	
PL5/32-02 ④		R1/4	11	29	28			20.7	14		18	PL5_32-02_	
PL3/16-M5④	3/16	M5×0.8	2.8 [3]	19.5	23 [22.8]	12.5	17.4	20.7	10	2.4	8.7	PL3_16-M5_[C]	
PL3/16-01 ④		R1/8	8	22.5	24.8			22.2	14	3.3	11	PL3_16-01_	
PL3/16-02 ④		R1/4	11	28	28.2						19	PL3_16-02_	
PL1/4-M5④	1/4	M5×0.8	2.8 [3]	19.5	23 [22.8]	12.5	17	20.3	10	2.4	8.5	PL1_4-M5_[C]	
PL1/4-01 ④		R1/8	8	22.5	24.8			21.8	14	5.3	4.6	11	PL1_4-01_
PL1/4-02 ④		R1/4	11	28	28.2						23.8	17	18
PL1/4-03 ④		R3/8	12	31.5	31.4			23.8	17	29	PL1_4-03_		
PL5/16-01 ④	5/16	R1/8	8	24	27.3	14.5	18.1	22.7	12	6	14	PL5_16-01_	
PL5/16-02 ④		R1/4	11	28	29.2			23.7	14	6.7	20	PL5_16-02_	
PL5/16-03 ④		R3/8	12	31	31.9			24.7	17		31	PL5_16-03_	
PL3/8-01 ④	3/8	R1/8	8	25	29.8	17.5	20.2	25.5	12	6	18	PL3_8-01_	
PL3/8-02 ④		R1/4	11	28.5	31.2			26	14	8	24	PL3_8-02_	
PL3/8-03 ④		R3/8	12	32	34.4			27	17	8.2	35	PL3_8-03_	
PL3/8-04 ④		R1/2	15	36	36.6			27.5	21		58	PL3_8-04_	
PL1/2-02 ④	1/2	R1/4	11	29.8	34.2	21	23.7	29.3	14	8	26	PL1_2-02_	
PL1/2-03 ④		R3/8	12	32.5	36.7			30	17	10	37	PL1_2-03_	
PL1/2-04 ④		R1/2	15	36.5	38.8			31	21	10.9	60	PL1_2-04_	
PL5/8-03 ④	5/8	R3/8	11	47	53.2	25	24.1	33.1	22	11	74	PL5_8-03_	
PL5/8-04 ④		R1/2	15	51	55.3					13	79	PL5_8-04_	

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L" is a reference value for height dimension after tightening taper thread.

※ 3. Dimensions in [] are for clean-room and clean-wash package products

※ 4. Orifice bore is the smallest passage converted in terms of the diameter.