


PLL
Mini


Long Elbow

RoHS compliant

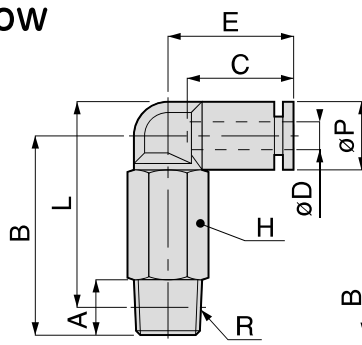

Metric thread type

Release-ring dimension



ØD: 3, 4, 6, 1/8, 5/32, 1/4 ØD: 1.8

Unit : mm

Model code	Tube O.D. ØD	R	A	B	L	ØP	Tube end C	E	Hex. H	X (ØX)	Y	Effective area (mm ²)	Weight (g)	CAD file name
PLL180-M3M④⑤	1.8	M3 × 0.5	2.5 [2.2]	19	19.5 [19.8]	6	8.4	10.3	5.5	4.8	—	0.8	2.7	PLL180-M3M(※5)
PLL180-M5M④⑤		M5 × 0.8	3 [3.2]	25	25 [24.8]				8				7.6	PLL180-M5M(※5)
PLL3-M3M④⑤	3	M3 × 0.5	2.5 [2.2]	19	19.5 [19.8]	6	9.3	10.8	5.5	7	6	0.6	2.8	PLL3-M3M(※5)
PLL3-M5M④⑤		M5 × 0.8	3 [3.2]	25	25 [24.8]				8			1.8	7.7	PLL3-M5M(※5)
PLL3-M6M④⑤		M6 × 1	3.9	26	25.1							2.1		PLL3-M6M
PLL3-01M④⑤		R1/8	8	28.5	28.5				10			2.3	13	PLL3-01M
PLL4-M3M④⑤	4	M3 × 0.5	2.5 [2.2]	23	24.5 [24.8]	8	11	15.1	8	9.8	7.8	0.9	6.8	PLL4-M3M(※5)
PLL4-M5M④⑤		M5 × 0.8	3 [3.2]	25	26 [25.8]							3	8.3	PLL4-M5M(※5)
PLL4-M6M④⑤		M6 × 1	3.9	26	26.1							3.7	8.4	PLL4-M6M
PLL4-01M④⑤		R1/8	8	28.5	28.5				10			4.2	14	PLL4-01M
PLL6-M5M④⑤	6	M5 × 0.8	3 [3.2]	26	28.3 [28.1]	10.5	11.6	16	8	11.8	9.8	3.3	9	PLL6-M5M(※5)
PLL6-M6M④⑤		M6 × 1	3.9	27	28.4							3.7		PLL6-M6M
PLL6-01M④⑤		R1/8	8	29.5	30.8				10			7.6	14	PLL6-01M
PLL1/8-M3M④⑤	1/8	M3 × 0.5	2.5 [2.2]	23	24.5 [24.8]	8	11	15.1	8	9.8	7.8	0.9	6.8	PLL1/8-M3M(※5)
PLL1/8-M5M④⑤		M5 × 0.8	3 [3.2]	25	26 [25.8]							2.5	8.4	PLL1/8-M5M(※5)
PLL1/8-M6M④⑤		M6 × 1	3.9	26	26.1							2.1		PLL1/8-M6M
PLL1/8-01M④⑤		R1/8	8	28.5	28.5				10			2.3	13	PLL1/8-01M
PLL5/32-M3M④⑤	5/32	M3 × 0.5	2.5 [2.2]	23	24.5 [24.8]	8	11	15.1	8	9.8	7.8	0.9	6.8	PLL5/32-M3M(※5)
PLL5/32-M5M④⑤		M5 × 0.8	3 [3.2]	25	26 [25.8]							3	8.3	PLL5/32-M5M(※5)
PLL5/32-M6M④⑤		M6 × 1	3.9	26	26.1							3.7	8.4	PLL5/32-M6M
PLL5/32-01M④⑤		R1/8	8	28.5	28.5				10			4.2	14	PLL5/32-01M
PLL1/4-M5M④⑤	1/4	M5 × 0.8	3 [3.2]	26	28.3 [28.1]	10.5	11.4	16.2	8	11.8	9.8	3.5	8.8	PLL1/4-M5M(※5)
PLL1/4-M6M④⑤		M6 × 1	3.9	27	28.4							3.6	8.8	PLL1/4-M6M
PLL1/4-01M④⑤		R1/8	8	29.5	30.8				10			8.4	14	PLL1/4-01M

※ 1. ④ in Model code / Replaced with "W" for Light-gray color

※ 2. ⑤ in Model code / Replaced with "C" for Clean-room package

※ 3. "L" is a reference value for height dimension after tightening taper thread.

※ 4. Dimensions in [] are for clean-room package products

※ 5. Visit PISCO website for CAD data of clean-room package products.