



PY Mini Union Y

RoHS compliant

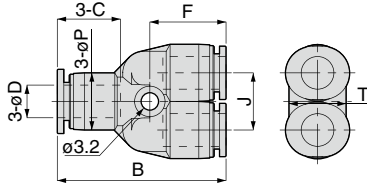

øD: 3, 4, 6, 1/8, 5/32, 1/4 øD: 1.8, 2


Unit : mm

Model code	Tube O.D. øD	B	øP	Tube end C	J	F	T	X	Y	Effective area (mm ²)	Weight (g)	CAD file name
PY180M④	1.8	19.5	6	8.4	16.5	11.8	7.4	4.8	—	0.4	1.7	PY180M
PY2M④	2	19.5	6	8.4	16.5	11.8	7.4	4.8	—	0.6	1.7	PY2M
PY3M④	3	28	8	9.3	8	12.8	8	7	6	2	2.7	PY3M
PY4M④	4	27.6	8	11	8	12.6	8	9.8	7.8	2.3	3.4	PY4M
PY6M④	6	31	10.5	11.6	10.5	14	10.5	11.8	9.8	6.8	5.5	PY6M
PY1/8M④	1/8	27.6	8	11	8	12.6	8	9.8	7.8	1.1	3.6	PY1_8M
PY5/32M④	5/32	27.6	8	11	8	12.6	8	9.8	7.8	2.3	3.4	PY5_32M
PY1/4M④	1/4	31.4	10.5	11.4	10.5	14.2	10.5	11.8	9.8	9.6	5.3	PY1_4M

※ 1. ④ in Model code / Replaced with "W" for Light-gray color and/or "C" for Clean-room package

PW Mini Unequal Union Y

RoHS compliant

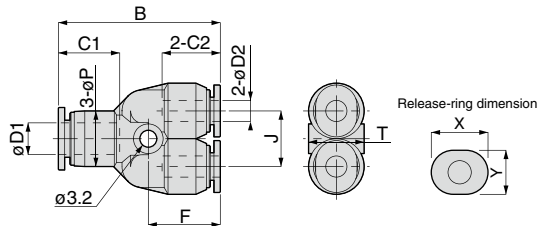

Unit : mm

Model code	Tube O.D. øD1	Tube O.D. øD2	B	øP	Tube end C1	Tube end C2	J	F	T	D1側開放リング		D2側開放リング		Effective area (mm ²)	Weight (g)	CAD file name
										X	Y	X	Y			
PW4-3M④	4	3	27.8	8	11	9.3	8	12.8	8	9.8	7.8	7	6	2.1	3	PW4-3M
PW4-1/8M④		1/8	27.6			11		12.6				9.8	7.8	1.8	3.5	PW4-1_8M
PW6-3M④	6	3	30.6	10.5	11.6	11	10.5	13.6	10.5	11.8	9.8	9.8	7.8	2.5	5.3	PW6-3M
PW6-4M④		4												4.2		PW6-4M
PW6-1/8M④		1/8												2.4	5.4	PW6-1_8M
PW1/8-3M④	1/8	3	27.6	8	11	11	8	12.6	8	9.8	7.8	9.8	7.8	1.7	3	PW1_8-3M
PW1/4-1/8M④	1/4	1/8	30.8	10.5	11.4	11	10.5	13.6	10.5	11.8	9.8	9.8	7.8	5.2	2.5	PW1_4-1_8M
PW1/4-5/32M④		5/32												3.6	6.9	PW1_4-5_32M
PW5/32-1/8M④	5/32	1/8	27.6	8	11	11	8	12.6	8	9.8	7.8	9.8	7.8	1.8	3.5	PW5_32-1_8M

※ 1. ④ in Model code / Replaced with "W" for Light-gray color and/or "C" for Clean-room package