


PWJ Unequal Plug-in Y

RoHS compliant

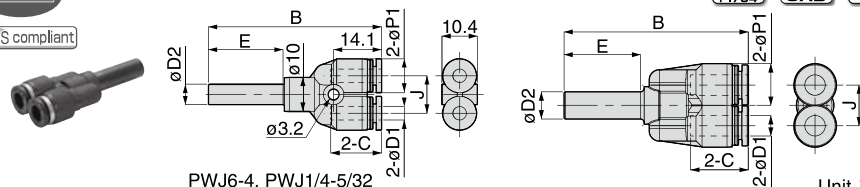


PWJ6-4, PWJ1/4-5/32

Unit : mm

Model code	Tube O.D. øD1	Tube dia. øD2	B	øP1	Tube end C	E	J	Orifice bore (ømm)	Weight (g)	CAD file name
PWJ6-4④	4	6	50.9	10	14.9	22	11	2.6	6.8	PWJ6-4
PWJ8-6④	6	8	54.2	12.5	17	22.5	12	5.3	8.8	PWJ8-6
PWJ10-8④	8	10	57.6	14.5	18.1	24	14	5.9	13	PWJ10-8
PWJ12-10④	10	12	67.2	17.5	20.2	28	18	7.4	22	PWJ12-10
PWJ16-12④	12	16	73.3	21	23.4	30	20	8.9	32	PWJ16-12
PWJ1/4-5/32④	5/32	1/4	50.9	10	14.9	22.3	11	2.6	6.8	PWJ1_4-5_32
PWJ5/16-1/4④	1/4	5/16	54.2	12.5	17	22.5	12	5.3	8.7	PWJ5_16-1_4
PWJ3/8-5/16④	5/16	3/8	57.6	14.5	18.1	24	14	5.9	13	PWJ3_8-5_16
PWJ1/2-3/8④	3/8	1/2	67.2	17.5	20.2	28	18	7.4	22	PWJ1_2-3_8

PRJ Plug-in Double Y

RoHS compliant

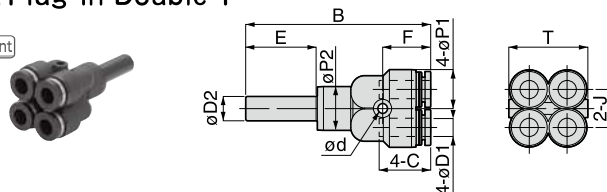

Unit : mm

Model code	Tube O.D. øD1	Tube dia. øD2	B	E	J	øP1	øP2	Tube end C	ød	F	T	Orifice bore (ømm)	Weight (g)	CAD file name
PRJ6-4④	4	6	55	22	10.3	10.5	12.5	14.9	3.2	14.2	21.3	3.2	13	PRJ6-4_
PRJ8-6④	6	8	60.8	23.2	12.5	13	14.5	17	3.2	15.8	26	4.6	19	PRJ8-6_

Common caution in this page

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. Orifice bore is the smallest passage converted in terms of the diameter.

OP
P.754

Page for special specifications

3D
CAD

3D CAD data is available at PISCO website.

CAD

CAD data is available at PISCO website.