



PX

Branch Y

RoHS compliant



Metric thread type

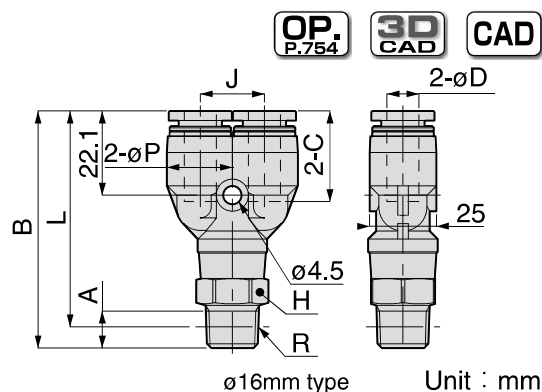

ø16mm type

Unit : mm

Model code	Tube O.D. øD	R	A	B	L	øP	Tube end C	J	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PX4-M5 ④	4	M5 × 0.8	2.8 [3]	32.9	30.1 [29.9]	10	14.9	10.3	8	2.4	8	PX4-M5_[C]
PX4-M6 ④		M6 × 1	3.8	36.4	32.6				10	3	11	PX4-M6_[C]
PX4-01 ④		R1/8	8	38.4	34.4				10	3.1	13	PX4-01_
PX4-02 ④		R1/4	11	43.4	37.4				14	3.3	20	PX4-02_
PX6-M5 ④	6	M5 × 0.8	2.8 [3]	38.3	35.5 [35.3]	12.5	17	12.5	10	2.4	13	PX6-M5_[C]
PX6-M6 ④		M6 × 1	3.8	39.3	35.5					3	11	PX6-M6_[C]
PX6-01 ④		R1/8	8	41.3	37.3				14	4.2	15	PX6-01_
PX6-02 ④		R1/4	11	48.3	42.2					4.8	22	PX6-02_
PX6-03 ④		R3/8	12	51.3	44.9				17		33	PX6-03_
PX8-01 ④	8	R1/8	8	46.1	42.1	14.5	18.1	14.5	12	5.9	20	PX8-01_
PX8-02 ④		R1/4	11	49.3	43.3				14	6.2	25	PX8-02_
PX8-03 ④		R3/8	12	52.5	46.2				17	6.6	36	PX8-03_
PX10-01 ④	10	R1/8	8	49.8	45.8	17.5	20.2	17.5	12	6	27	PX10-01_
PX10-02 ④		R1/4	11	53.6	47.6				14	7.2	32	PX10-02_
PX10-03 ④		R3/8	12	56.7	50.4				17	7.4	43	PX10-03_
PX10-04 ④		R1/2	15	60.2	52				21	7.8	66	PX10-04_
PX12-02 ④	12	R1/4	11	58.6	52.6	21	23.4	21	14	7.5	40	PX12-02_
PX12-03 ④		R3/8	12	60.6	54.3				17	8.4	51	PX12-03_
PX12-04 ④		R1/2	15	64.7	56.5				21	8.3	74	PX12-04_
PX16-03 ④	16	R3/8	11	76.1	69.8	25	24.1	24	22	11	89	PX16-03_
PX16-04 ④		R1/2	15	80.1	71.9					12.7	93	PX16-04_
PX5/32-01 ④	5/32	R1/8	8	38.4	34.4	10	14.9	10.3	10	3.1	13	PX5_32-01_
PX5/32-02 ④		R1/4	11	43.4	37.4				14	3.3	20	PX5_32-02_
PX3/16-01 ④	3/16	R1/8	8	41.7	37.7	12.5	17.4	12.5	10	4.2	15	PX3_16-01_
PX3/16-02 ④		R1/4	11	48.7	42.6				14	5.1	23	PX3_16-02_
PX1/4-01 ④	1/4	R1/8	8	41.3	37.3	12.5	17	12.5	10	4.2	15	PX1_4-01_
PX1/4-02 ④		R1/4	11	48.3	42.2				14	5.2	22	PX1_4-02_
PX1/4-03 ④		R3/8	12	51.3	44.9				17	5.5	33	PX1_4-03_
PX5/16-01 ④	5/16	R1/8	8	46.1	42.1	14.5	18.1	14.5	12	5.9	20	PX5_16-01_
PX5/16-02 ④		R1/4	11	49.3	43.3				14	6.2	25	PX5_16-02_
PX5/16-03 ④		R3/8	12	52.5	46.2				17	6.6	36	PX5_16-03_
PX3/8-01 ④	3/8	R1/8	8	49.8	45.8	17.5	20.2	17.5	12	6	27	PX3_8-01_
PX3/8-02 ④		R1/4	11	53.6	47.6				14	7.2	33	PX3_8-02_
PX3/8-03 ④		R3/8	12	56.7	50.4				17	7.4	44	PX3_8-03_
PX3/8-04 ④		R1/2	15	60.2	52				21	7.8	67	PX3_8-04_
PX1/2-02 ④	1/2	R1/4	11	58.9	52.9	21	23.7	21	14	7.5	39	PX1_2-02_
PX1/2-03 ④		R3/8	12	60.9	54.6				17		51	PX1_2-03_
PX1/2-04 ④		R1/2	15	65	56.8				21	8.4	74	PX1_2-04_

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L" is a reference value for height dimension after tightening taper thread.

※ 3. Dimensions in [] are for clean-room and clean-wash package products.

※ 4. Orifice bore is the smallest passage converted in terms of the diameter.



Page for special specifications



3D CAD data is available at PISCO website.



CAD data is available at PISCO website.