


PY Union Y

RoHS compliant

OP. P.754 3D CAD CAD

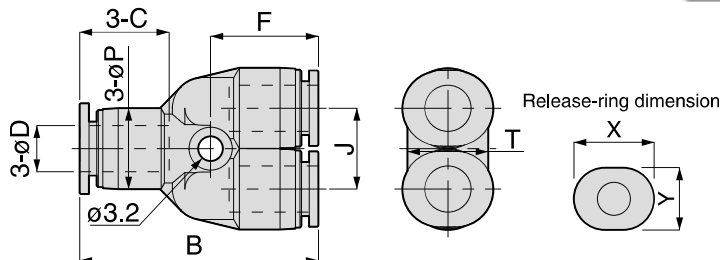

Unit : mm


Model code	Tube O.D. øD	B	øP	Tube end C	J	F	T	X	Y	Effective area (mm ²)	Weight (g)	CAD file name
PY3M ④⑤	3	28	8	9.3	8	12.8	8	7	6	2	2.7	PY3M
PY4M ④⑤	4	27.6	8	11	8	12.6	8	9.8	7.8	2.3	3.4	PY4M
PY6M ④⑤	6	31	10.5	11.6	10.5	14	10.5	11.8	9.8	6.8	5.5	PY6M
PY1/8M ④⑤*	1/8	27.6	8	11	8	12.6	8	9.8	7.8	1.1	3.6	PY1'8M
PY1/4M ④⑤*	1/4	31.4	10.5	11.4	10.5	14.2	10.5	11.8	9.8	9.6	5.3	PY1'4M

※ 1. ④ in Model code / Replaced with "W" for Light-gray color
 ※ 2. ⑤ in Model code / Replaced with "C" for Clean-room package

PW Unequal Union Y

RoHS compliant

OP. P.754 3D CAD CAD

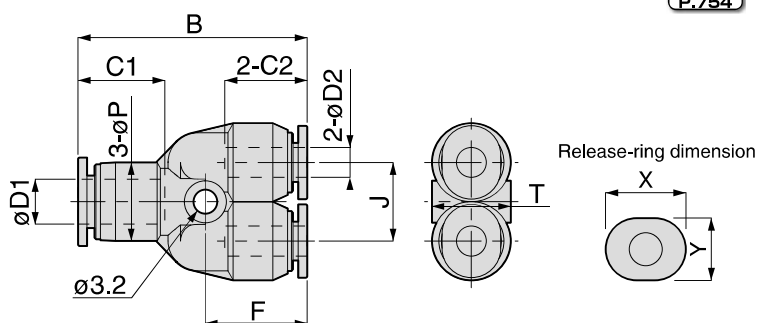

Unit : mm

Model code	Tube O.D. øD1	Tube O.D. øD2	B	øP	Tube end C1	Tube end C2	J	F	T	D1側開放リング		D2側開放リング		Effective area (mm ²)	Weight (g)	CAD file name
										X	Y	X	Y			
PW4-3M ④⑤	4	3	27.8	8	11	9.3	8	12.8	8	9.8	7.8	7	6	2.1	3	PW4-3M
PW4-1/8M ④⑤*		1/8	27.6			11		12.6				9.8	7.8	1.8	3.5	PW4-1'8M
PW6-3M ④⑤	6	3	30.6	10.5	11.6	11	10.5	13.6	10.5	11.8	9.8	9.8	7.8	2.5	5.3	PW6-3M
PW6-4M ④⑤		4												4.2		PW6-4M
PW6-1/8M ④⑤*		1/8												2.4		PW6-1'8M
PW1/8-3M ④⑤*	1/8	3	27.6	8	11	11	8	12.6	8	9.8	7.8	9.8	7.8	1.7	3	PW1'8-3M
PW1/4-1/8M ④⑤*	1/4	1/8	30.8	10.5	11.4	11	10.5	13.6	10.5	11.8	9.8	9.8	7.8	5.2	2.5	PW1'4-1'8M
PW1/4-5/32M ④⑤*		5/32												3.6		PW1'4-5'32M

※ 1. ④ in Model code / Replaced with "W" for Light-gray color
 ※ 2. ⑤ in Model code / Replaced with "C" for Clean-room package