

RV Series NAMUR Solenoid Valve(5/2,5/3 way)



How to Order?

Standard Solenoid Valve

Series No.	Ways	Positions	Valve Body ID Code	Controls	Initial Status	Port Size	Reset Type	Valve Body Type	ID Code	Voltage	Connection Mode	Cover Color	Thread Type
RV (Solenoid valve)	5:5 ways	1: 1Series 2: 2Series 3: 3Series 4: 4Series		1: Single control 2: Double control	C: Center close P: Center pressure E: Center exhaust (only for 5/3 ways)	M5:M5 06:1/8" 08:1/4" 10:3/8" 15:1/2"	Blank: Spring return (Only apply to 4 series single control valve) Q: Air return (Only apply to 1,2,3 series single control valve)	M: NAMUR type Blank: Standard type A: Amisco coil	E1: AC110V E2: AC220V E3: AC380V E4: DC24V E5: DC12V	E6: AC36V E7: AC24V E8: DC110V E9: DC48V E10: DC36V	Blank: DIN connector type K: Water proof connector type M: M8 connector type (K/M only for 2,3,4 series)	Blank: Brown translucent J: Colorless and translucent B: Black (only black color available for K/M)	Blank: G P: PT T: NPT


Order Example:

RV series solenoid valve, 5/2 ways, 1 series valve body size, double control, 1/8 "port size, NUMAR type, standard coil, DC24V, Fly leads connector, G thread, ERP code is RV5212-06ME2F

Specifications

Model	RV5211-M5QM RV5212-M5M RV5312-M5M	RV5211-06QM RV5212-06M RV5312-06M	RV5221-06QM RV5222-06M RV5322-06M	RV5221-08QM RV5222-08M RV5322-08M	RV5231-08QM RV5232-08M RV5332-08M	RV5231-10QM RV5232-10M RV5332-10M	RV5241-10M RV5242-10M RV5342-10M	RV5241-15M RV5242-15M RV5342-15M
Port Size	M5	G1/8	G1/8	G1/4(Ex.G1/8)	G1/4	G3/8(Ex.G1/4)	G3/8	G1/2
Sectional area(mm)	5/2: 5.5(CV=0.31) 5/3: 5.5(CV=0.28)	5/2: 12(CV=0.67) 5/3: 9(CV=0.50)	5/2: 14(CV=0.78) 5/3: 12(CV=0.67)	5/2: 16(CV=0.89) 5/3: 12(CV=0.67)	5/2: 25(CV=1.40) 5/3: 18(CV=1.00)	5/2: 30(CV=1.68) 5/3: 18(CV=1.00)	5/2: 50(CV=2.79) 5/3: 30(CV=1.67)	5/2: 50(CV=2.79) 5/3: 30(CV=1.67)
Working medium	Clean air(After 40 μ m filtration)							
Acting type	Internal pilot							
Reset type	Air reset						Spring reset / Air reset	
Lubrication	Not required							
Working pressure(MPa)	0.15~0.8							
Guaranteed Pressure(MPa)	1.2							
Working temperature(℃)	-20~70(No freezing)							
Voltage Range	-15%~10%							
Power Consumption	DC:2.8W ; AC:3.0VA			DC:3.0W ; AC:4.0VA				
Insulation Class	Class F							
Protective Class	IP65(DIN40050)							
Max. acting frequency	5/2: 5 cycles/s; 5/3: 3 cycles/s							
Activate time(S)	<0.05							
Weight(g)	RV5211: M:113 RV5212: M:176 RV5312: M:186		RV5221: M:208 RV5222: M:306 RV5322: M:349		RV5231: M:300 RV5232: M:409 RV5332: M:459		RV5241: M:533 RV5242: M:666 RV5342: M:755	

Flow Chat

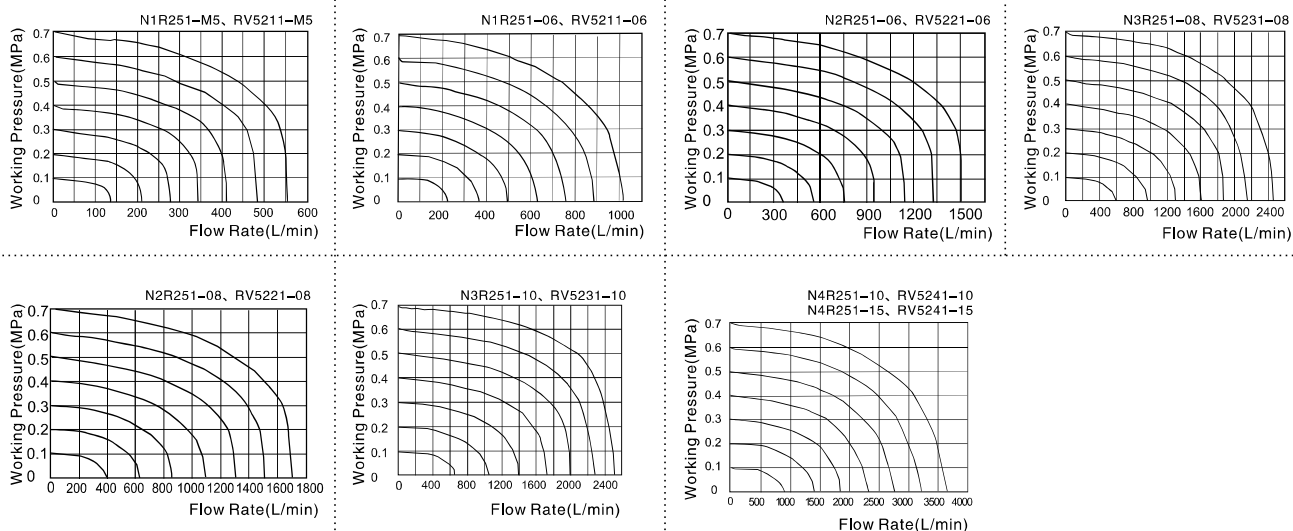


RV Series NAMUR Solenoid Valve(5/2,5/3 way)




1
RV (3/2,3/5)
NAMUR Type

Internal Structure


Single Solenoid Valve



Double Solenoid Valve

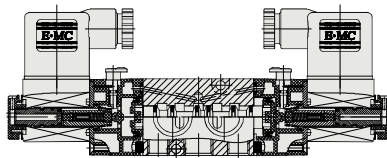

5/3 Ways Solenoid Valve

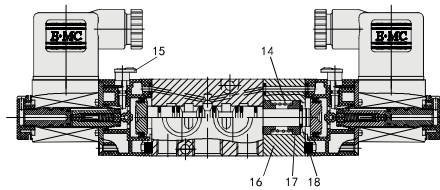


No.	Part Name	Material
1	Connector	Engineered plastics
2	Fixing Nut	POM
3	Coil	Brass+Thermoset Resin
4	Pilot Units	Pure iron+Brass+Stainless Steel
5	Plate	Carbon Steel
6	Piston	POM
7	Pilot Seat	Engineered plastics
8	Valve Body	Aluminum Alloy
9	Spool	Aluminum Alloy
10	O ring	NBR
11	Rear Cover	Engineered plastics
12	Filter	High Molecular Material
13	Piston	Engineered plastics
14	Spring	Stainless Steel
15	Manual Override	Engineered plastics
16	Back Seat	Aluminum Alloy
17	Spring Seat	Aluminum Alloy
18	C type buckle	65Mn


Main Dimension

Single Solenoid Valve

DIN Type

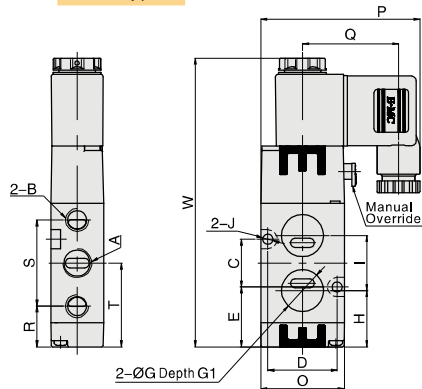

Flying Lead Type




Model/Sign	A	B	C	D	E	F	G	G1	H	I	J	O	P	Q	R	S	T	W
RV5211-M5QM	M5	M5	14	22	24.5	18	13.6	1.5	22.3	18.5	3.3	27	55.2	33.9	17.9	27.2	31.5	103.1
RV5211-06QM	G1/8	G1/8	14	22	24.5	18	13.6	1.5	22.3	18.5	3.3	27	55.2	33.9	17.9	28	31.5	103.1
RV5221-06QM	G1/8	G1/8	20	29	25	22	17.6	1.5	23.5	23	4.3	35	66.7	40.2	17	36	35	120.7
RV5221-08QM	G1/4	G1/8	20	29	25	22	17.6	1.5	23.5	23	4.3	35	66.7	40.2	17	36	35	120.7
RV5231-08QM	G1/4	G1/4	24	32	32.1	27	19.6	1.5	32.1	24	5.2	40	69.2	40.2	21.6	45	44.1	139.3
RV5231-10QM	G3/8	G1/4	24	32	32.1	27	19.6	1.5	32.1	24	5.2	40	69.2	40.2	21.6	45	44.1	139.3
RV5241-10M	G3/8	G3/8	33	41	40.5	34	21.8	1.8	38.8	36.5	6	50	74.2	40.2	25.5	63	57	168.7
RV5241-15M	G1/2	G1/2	33	41	40.5	34	21.8	1.8	38.8	36.5	6	50	74.2	40.2	25.5	63	57	168.7


Note: N series energy saving solenoid valve have same sizes as above table.

Double Solenoid Valve

DIN Type




Flying Lead Type




5/3 Ways Solenoid Valve

DIN Type



Flying Lead Type



Model/Sign	W1	W2
RV5212-M5QM	143.2	158.2
RV5212-06QM	143.2	158.2
RV5222-06QM	171.4	190.4
RV5222-08QM	171.4	190.4
RV5232-08QM	190.4	209.4
RV5232-10QM	190.4	209.4
RV5242-10M	223.4	244.4
RV5242-15M	223.4	244.4