

YHS

Slide Valve







Product Features

- * Normally working with main valve together, not be used separately
- * Provide assistance to control the system better

O How to Order?

Series No.	— Port Size	Туре —	Thread Type
YHS: Slide valve	06: 1/8 " 15: 1/2 " 08: 1/4 " 20: 3/4 " 10: 3/8 " 25: 1 "	Blank: Standard type MM: Double male thread type FF:Double female thread type MF:One male and the other fem	Blank: G P: PT T: NPT ale type


Order Example:

YHS slide valve,1/4" port size, double male thread type, G thread ,ERP code is: YHS-08MM

Specifications

Model	YHS-06	YHS-08	YHS-10	YHS-15	YHS-20	YHS-25	
Working medium	Clean air(After 40 µ m filteration)						
Acting type	External control						
Lubrication	Not required						
Working pressure (MPa)	0~1.0						
Guaranteed pressure (MPa)	1.5						
Working temperature (°C)	-5~60						
Port size	1/8"	1/4"	3/8"	1/2"	3/4"	1"	

Main Dimension

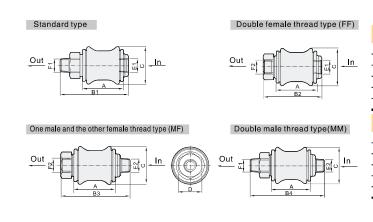

Model	Α	B1	ı	32	В	3	B4		С
YHS06	20	38	:	38	38		46		20
YHS08	32	58	ţ	58	58	3	68		26
YHS10	32	58	ţ	58	58	3	69		32
YHS15	40	80		30	80)	94		38
YHS20	45	85	85 85		85	5	101		46
YHS25	45	85	5 85 85		5	101		52	
Model	D	E1		Е	2		F1		F2
Model YHS06	D 14	E1	3"	G1			F1 1/8"		F2 G1/8"
			_		/8"	G		⊢	. –
YHS06	14	G1/8	ļ"	G1	/8" /4"	G	1/8"		G1/8"
YHS06 YHS08	14 19	G1/8	Ļ" }"	G1 G1	/8" /4" /8"	6	1/8" 1/4"		G1/8" G1/4"
YHS06 YHS08 YHS10	14 19 22	G1/8 G1/4 G3/8	I" 3" 2"	G1 G1	/8" /4" /8"	G G	i 1/8" i 1/4" i 3/8"		G1/8" G1/4" G3/8"