




Fitting Series

Tube Fitting Stainless SUS316 Compression Fitting Series

FITTING

NSL Elbow

RoHS compliant

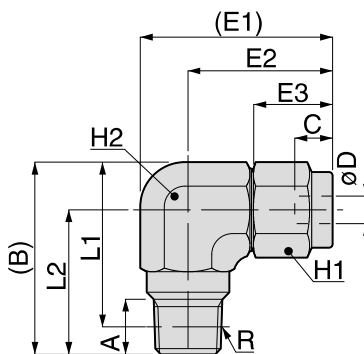

Unit : mm

Model code	Tube O.D. x I.D. øD	R	A	B	L1	L2	E1	E2	E3	C	Hex. H1	Hex. H2	Weight (g)	Orifice dia. (ø mm)	Effective area (mm ²)	CAD file name
NSL0420-01 □	4 × 2	R1/8	8	27.9	24	21	27.9	21	11.5	5.5	10	12	27	1.4	0.7	NSL0420-01
NSL0420-02 □		R1/4	11	30.1	24.1	22	30.1	22				14	35			NSL0420-02
NSL0425-01 □	4 × 2.5 (※ 1)	R1/8	8	27.9	24	21	27.9	21	11.5	5.5	10	12	27	1.4	0.9	NSL0425-01
NSL0425-02 □		R1/4	11	30.1	24.1	22	30.1	22				14	35			NSL0425-02
NSL0640-01 □	6 × 4	R1/8	8	27.9	24	21	27.9	21	11.5	6	12	12	28	3	5.5	NSL0640-01
NSL0640-02 □		R1/4	11	30.1	24.1	22	30.1	22				14	37			NSL0640-02
NSL0640-03 □		R3/8	12	40	33.6	29	40	29				19	87			NSL0640-03
NSL0860-01 □	8 × 6 (※ 2)	R1/8	8	34.8	30.8	25	34.8	25	13.5	7	14	17	62	5	14.5	NSL0860-01
NSL0860-02 □		R1/4	11	34.8	28.8	25	34.8	25				17	59			NSL0860-02
NSL0860-03 □		R3/8	12	40	33.6	29	40	29				19	87			NSL0860-03
NSL1075-02 □	10 × 7.5	R1/4	11	40	34	29	40	29	16.5	9	17	19	90	6	20	NSL1075-02
NSL1075-03 □		R3/8	12	40	33.6	29	40	29				19	90			NSL1075-03
NSL1075-04 □		R1/2	15	44.3	36.1	31	44.3	31				23	130			NSL1075-04
NSL1080-02 □	10 × 8	R1/4	11	40	34	29	40	29	16.5	9	17	19	88	6	23	NSL1080-02
NSL1080-03 □		R3/8	12	40	33.6	29	40	29				19	88			NSL1080-03
NSL1080-04 □		R1/2	15	44.3	36.1	31	44.3	31				23	127			NSL1080-04
NSL1290-02 □	12 × 9	R1/4	11	40	34	29	40	29	16.5	9	19	19	90	7.5	30	NSL1290-02
NSL1290-03 □		R3/8	12	40	33.6	29	40	29				19	91			NSL1290-03
NSL1290-04 □		R1/2	15	44.3	36.1	31	44.3	31				23	133			NSL1290-04
NSL1210-02 □	12 × 10	R1/4	11	40	34	29	40	29	16.5	9	19	19	88	7.5	38	NSL1210-02
NSL1210-03 □		R3/8	12	40	33.6	29	40	29				19	90			NSL1210-03
NSL1210-04 □		R1/2	15	44.3	36.1	31	44.3	31				23	131			NSL1210-04
NSL1613-03 □	16 × 13	R3/8	14	45.3	38.9	32	45.3	32	18	9.5	23	23	125	11.5	64	NSL1613-03
NSL1613-04 □		R1/2	17	45.3	37.1	32	45.3	32				23	130	11.5	64	NSL1613-04
NSL1'4-01 □	6.35 × 4.57	R1/8	8	27.9	24	21	27.9	21	11.5	6	12	12	27	3.5	7	NSL1'4-01
NSL1'4-02 □		R1/4	11	30.1	24.1	22	30.1	22				14	35			NSL1'4-02
NSL1'4-03 □		R3/8	12	40	33.6	29	40	29				19	86			NSL1'4-03
NSL3'8-02 □	9.53 × 6.99	R1/4	11	40	34	29	40	29	16.5	9	17	19	88	5.5	18	NSL3'8-02
NSL3'8-03 □		R3/8	12	40	33.6	29	40	29				19	89			NSL3'8-03
NSL3'8-04 □		R1/2	15	44.3	36.1	31	44.3	31				23	132			NSL3'8-04
NSL1'2-02 □	12.7 × 9.56	R1/4	11	40	34	29	40	29	16.5	9	19	19	88	8.1	30	NSL1'2-02
NSL1'2-03 □		R3/8	12	40	33.6	29	40	29				19	89			NSL1'2-03
NSL1'2-04 □		R1/2	15	44.3	36.1	31	44.3	31				23	131			NSL1'2-04

※ 1. Equal to inch size 5/32

※ 2. Equal to inch size 5/16

※ 3. "L1" is a reference value for height dimension after tightening thread.

※ 4. □ in Model code / Replaced with "TP" for Seal tape



3D CAD data is available at PISCO website.



CAD data is available at PISCO website.

127

Standard
Series

Mini
Series

Stainless
Series