


## PAU Branch Union Elbow

RoHS compliant

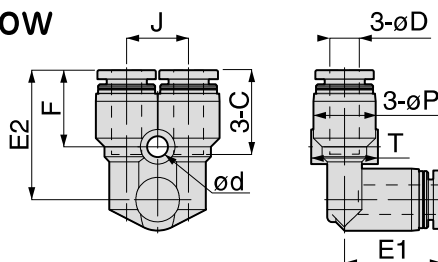

OP.  
P.754

3D  
CAD


CAD

Unit : mm

| Model code | Tube O.D.<br>øD | E1   | øP   | Tube end<br>C | J    | E2   | ød  | F    | T    | Orifice bore<br>(ømm) | Weight<br>(g) | CAD<br>file name |
|------------|-----------------|------|------|---------------|------|------|-----|------|------|-----------------------|---------------|------------------|
| PAU4④      | 4               | 16.9 | 10   | 14.9          | 10.3 | 22.7 | 3.2 | 14.2 | 10.4 | 3.5                   | 7.7           | PAU4_            |
| PAU6④      | 6               | 19.8 | 12.5 | 17            | 12.5 | 26.2 | 4.2 | 15.5 | 13.5 | 4.5                   | 11            | PAU6_            |
| PAU8④      | 8               | 22.7 | 14.5 | 18.1          | 14.5 | 29.4 | 4.2 | 16.9 | 15.6 | 6.4                   | 16            | PAU8_            |
| PAU10④     | 10              | 25   | 17.5 | 20.2          | 17.5 | 33.5 | 4.2 | 18.5 | 18.2 | 8.5                   | 27            | PAU10_           |
| PAU12④     | 12              | 29.4 | 21   | 23.4          | 21   | 35.2 | 4.2 | 20.4 | 21.7 | 10.4                  | 39            | PAU12_           |
| PAU5/32④   | 5/32            | 16.9 | 10   | 14.9          | 10.3 | 22.7 | 3.2 | 14.2 | 10.4 | 3.5                   | 7.7           | PAU5_32_         |
| PAU3/16④   | 3/16            | 20.2 | 12.5 | 17.4          | 12.5 | 26.6 | 4.2 | 15.9 | 13.5 | 4.4                   | 12            | PAU3_16_         |
| PAU1/4④    | 1/4             | 19.8 | 12.5 | 17            | 12.5 | 26.2 | 4.2 | 15.5 | 13.5 | 4.8                   | 11            | PAU1_4_          |
| PAU5/16④   | 5/16            | 22.7 | 14.5 | 18.1          | 14.5 | 29.4 | 4.2 | 16.9 | 15.6 | 6.4                   | 16            | PAU5_16_         |
| PAU3/8④    | 3/8             | 25   | 17.5 | 20.2          | 17.5 | 33.5 | 4.2 | 18.5 | 18.2 | 8.5                   | 27            | PAU3_8_          |
| PAU1/2④    | 1/2             | 29.7 | 21   | 23.7          | 21   | 35.5 | 4.2 | 20.7 | 21.7 | 10.4                  | 38            | PAU1_2_          |

## PVU Tripod Union

RoHS compliant

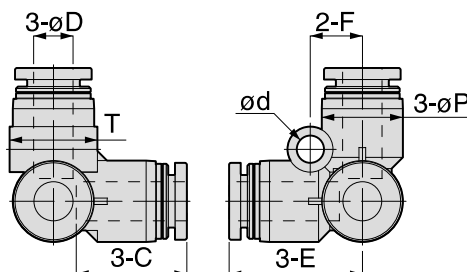

OP.  
P.754

3D  
CAD

CAD

Unit : mm

| Model code | Tube O.D.<br>øD | øP   | Tube end<br>C | E    | ød  | F   | T    | Orifice bore<br>(ømm) | Weight<br>(g) | CAD<br>ファイル名 |
|------------|-----------------|------|---------------|------|-----|-----|------|-----------------------|---------------|--------------|
| PVU4④      | 4               | 10   | 14.9          | 17.8 | 3.2 | 6.5 | 10.4 | 3                     | 7.2           | PVU4_        |
| PVU6④      | 6               | 12.5 | 17            | 20.5 | 4.2 | 8   | 13.5 | 4.6                   | 10            | PVU6_        |
| PVU8④      | 8               | 14.5 | 18.1          | 22.7 | 4.2 | 10  | 15.6 | 6.7                   | 15            | PVU8_        |
| PVU10④     | 10              | 17.5 | 20.2          | 26.2 | 4.2 | 12  | 18.2 | 8.3                   | 25            | PVU10_       |
| PVU12④     | 12              | 21   | 23.4          | 30.2 | 4.2 | 14  | 21.7 | 10.3                  | 35            | PVU12_       |
| PVU5/32④   | 5/32            | 10   | 14.9          | 17.8 | 3.2 | 6.5 | 10.4 | 3                     | 7.2           | PVU5_32_     |
| PVU3/16④   | 3/16            | 12.5 | 17.4          | 20.9 | 4.2 | 8   | 13.5 | 4                     | 10            | PVU3_16_     |
| PVU1/4④    | 1/4             | 12.5 | 17            | 20.5 | 4.2 | 8   | 13.5 | 5.3                   | 11            | PVU1_4_      |
| PVU5/16④   | 5/16            | 14.5 | 18.1          | 22.7 | 4.2 | 10  | 15.6 | 6.7                   | 15            | PVU5_16_     |
| PVU3/8④    | 3/8             | 17.5 | 20.2          | 26.2 | 4.2 | 12  | 18.2 | 8.2                   | 25            | PVU3_8_      |
| PVU1/2④    | 1/2             | 21   | 23.7          | 30.5 | 4.2 | 14  | 21.7 | 11                    | 34            | PVU1_2_      |

Common caution in this page

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. Orifice bore is the smallest passage converted in terms of the diameter.

OP.  
P.000

Page for special specifications

3D  
CAD

3D CAD data is available at PISCO website.

CAD

CAD data is available at PISCO website.