



PVX Tripod Elbow

RoHS compliant

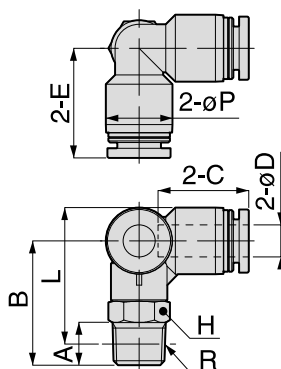

Metric thread type



Unit : mm

Model code	Tube O.D. øD	R	A	B	L	øP	Tube end C	E	Hex. H	Orifice bore (ømm)	Weight (g)	CAD file name
PVX4-M5 ④	4	M5×0.8	2.8 [3]	20.3	22.5 [22.3]	10	14.9	18.2	10	2.4	10	PVX4-M5_[C]
PVX4-M6 ④		M6×1	3.8	21.3	22.5						11	PVX4-M6_[C]
PVX4-01 ④		R1/8	8	23.3	24.3			20.7	14	3	13	PVX4-01_
PVX4-02 ④		R1/4	11	29	28						20	PVX4-02_
PVX6-M5 ④	6	M5×0.8	2.8 [3]	20.3	23.7 [23.5]	12.5	17	20.5	10	2.4	12	PVX6-M5_[C]
PVX6-M6 ④		M6×1	3.8	21.3	23.7							PVX6-M6_[C]
PVX6-01 ④		R1/8	8	23.3	25.5			21.8	14	4.6	15	PVX6-01_
PVX6-02 ④		R1/4	11	28	28.2						22	PVX6-02_
PVX6-03 ④		R3/8	12	31.5	31.4			23.8	17		33	PVX6-03_
PVX8-01 ④	8	R1/8	8	25	28.3	14.5	18.1	22.7	12	6.7	20	PVX8-01_
PVX8-02 ④		R1/4	11	29	30.2			23.7	14		25	PVX8-02_
PVX8-03 ④		R3/8	12	32	32.9			24.7	17		36	PVX8-03_
PVX10-01 ④	10	R1/8	8	25.9	30.6	17.5	20.2	26	12	8.3	25	PVX10-01_
PVX10-02 ④		R1/4	11	29.4	32.1				14		31	PVX10-02_
PVX10-03 ④		R3/8	12	33	35.4			27	17		42	PVX10-03_
PVX10-04 ④		R1/2	15	37	37.6				21		66	PVX10-04_
PVX12-02 ④	12	R1/4	11	30.8	35.2	21	23.4	30.2	14	8	37	PVX12-02_
PVX12-03 ④		R3/8	12	33.5	37.7				17		49	PVX12-03_
PVX12-04 ④		R1/2	15	38	40.3			31.2	21		74	PVX12-04_

- ※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package
- ※ 2. "L" is a reference value for height dimension after tightening taper thread.
- ※ 3. Dimensions in [] are for clean-room and clean-wash package products.
- ※ 4. Orifice bore is the smallest passage converted in terms of the diameter.

FITTING

CONTROLLER

VALVE

TUBE

MAKE-TO-ORDER
PRODUCTS

54

Standard
Series

Mini
Series

Stainless
Series

Chemical
Series

PP
Series

EG
Series

Antispatter
& Brass Series

Die Temperature
Control

Minimal
Series

Stoo Fitting
Series

Rotary
Series

Twist-Proof
Fitting

Block and
Connector

Coupling

Color
Cap